

GENERAL NOTES

- ALL GYPSUM BOARD THROUGHOUT IS TO BE 5/8" TYPE-X AS A MINIMUM.
- ALL EXISTING INTERIOR WALLS THAT ARE TO REMAIN ARE TO BE PATCHED AS REQUIRED FROM NEW UTILITIES OR GENERAL CONSTRUCTION.
- INFILL OF EXISTING WALL OPENINGS IS TO RESULT IN FLUSH FINISHES ON BOTH SIDES OF THE WALL. UNLESS OTHERWISE NOTED, USE APPROPRIATE STUD FRAMING TO ACHIEVE DESIRED FINISH.
- INSTALL WOOD BLOCKING IN WALLS AS NECESSARY FOR INSTALLATION OF ALL CASEWORK, MIRRORS, TOWEL BARS, SHOWER CURTAIN RODS, TOILET PAPER DISPENSERS, PAPER TOWEL HOLDERS, TOILET PARTITIONS, RAILINGS, AND ANY OTHER ACCESSORIES.
- PROVIDE CEMENT BOARD IN LIEU OF GYPSUM BOARD AT ALL BATHTUB, SHOWER, AND KITCHEN LOCATIONS TO RECEIVE WALL TILE. COORDINATE WITH INTERIORS.
- DRAWINGS ESTABLISH THE DESIGN INTENT OF WORK TO BE PERFORMED. ALL PRODUCTS SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. ALL TRADES SHALL CAREFULLY COORDINATE WORK OF ALL OTHER TRADES. CONTRACTORS SHALL BE RESPONSIBLE FOR FIELD VERIFYING EXISTING CONDITIONS AND FOR VERIFYING THEM WITH THE CONTRACT DOCUMENTS. ANY DISCREPANCIES OR CONFLICTS SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT AND THE OWNER PRIOR TO FABRICATION OR INSTALLATION.
- COORDINATE SIZE AND LOCATION OF ALL EQUIPMENT SUPPORTS INCLUDING BUT NOT RESTRICTED TO CONCRETE HOUSEKEEPING PADS WITH APPROPRIATE EQUIPMENT MANUFACTURER.
- VERIFY QUANTITY, SIZE, AND LOCATION OF ALL FLOOR, ROOF, AND WALL OPENINGS FOR ALL DISCIPLINES INCLUDING BUT NOT RESTRICTED TO MECHANICAL AND ELECTRICAL WORK WITH THE APPROPRIATE TRADE. PROVIDE ALL OPENINGS SHOWN OR REQUIRED FOR THE COMPLETION OF THE WORK. PROVIDE ALL LINTELS REQUIRED FOR THESE OPENINGS PER SPECIFICATIONS.
- VERIFY QUANTITY, SIZE, AND LOCATION OF ALL FLOOR, ROOF, AND WALL OPENINGS FOR ALL DISCIPLINES INCLUDING BUT NOT RESTRICTED TO MECHANICAL AND ELECTRICAL WORK WITH THE APPROPRIATE TRADE.
- DIMENSIONS PRECEDED BY +/- SHOULD BE REVIEWED AND ALL NECESSARY ADJUSTMENTS MADE PRIOR TO FABRICATION AND/OR INSTALLATION OF AFFECTED WORK. NOTIFY ARCHITECT'S REPRESENTATIVE IF DISCREPANCIES ARISE BEFORE PROCEEDING WITH THE WORK.
- BATHROOM MIRRORS AND LIGHT FIXTURES ABOVE VANITIES SHALL BE CENTERED ON THE SINKS.

INTERIOR STEEL STUD FRAMING


THE INTERIOR STUD FRAMING GUIDE DESIGNATES THE DESIGN INTENT OF THE ARCHITECT. THE GUIDE IS FOR THE CONTRACTORS REFERENCE WHEN INSTALLING INTERIOR STUD FRAMED WALLS. IT IS THE CONTRACTORS RESPONSIBILITY TO FOLLOW ALL INFORMATION PORTRAYED WITHIN THIS GUIDE AND THE CONTRACT DOCUMENTS.

NOTE: VERIFY MIN. STEEL STUD FRAMING GAUGE REQUIREMENTS /MAXIMUM ALLOWABLE HEIGHTS WITH STEEL STUD FRAMING SUPPLIER.



*FIRE BLOCKING TO BE PROVIDED HORIZONTALLY AT 10'-0" O.C. MAX, FIRE CAULK AROUND BLOCKING, IF METAL STUDS ARE USED A MINIMUM OF 20 GA. STUDS MUST BE UTILIZED.

MAXIMUM ALLOWABLE HEIGHTS
(NON-LOAD BEARING - METAL STUDS)



STEEL STUD FRAMING SECTION 092216	COLD-FORMED MTL FRAMING SECTION 054000		* DEFLECTION = L/360 * SPACING = 16" O.C.					
	GA.	25	20	18	16	14	12	
2 1/2"		9'-10"	11'-2"	12'-7"	13'-5"	14'-4"	--	
3 5/8"		12'-4"	14'-3"	16'-8"	17'-11"	19'-2"	21'-2"	
6"		17'-11"	21'-4"	24'-9"	26'-7"	28'-4"	31'-8"	
2 1/2" CH STUD		10'-7"	13'-4"	--	--	--	--	

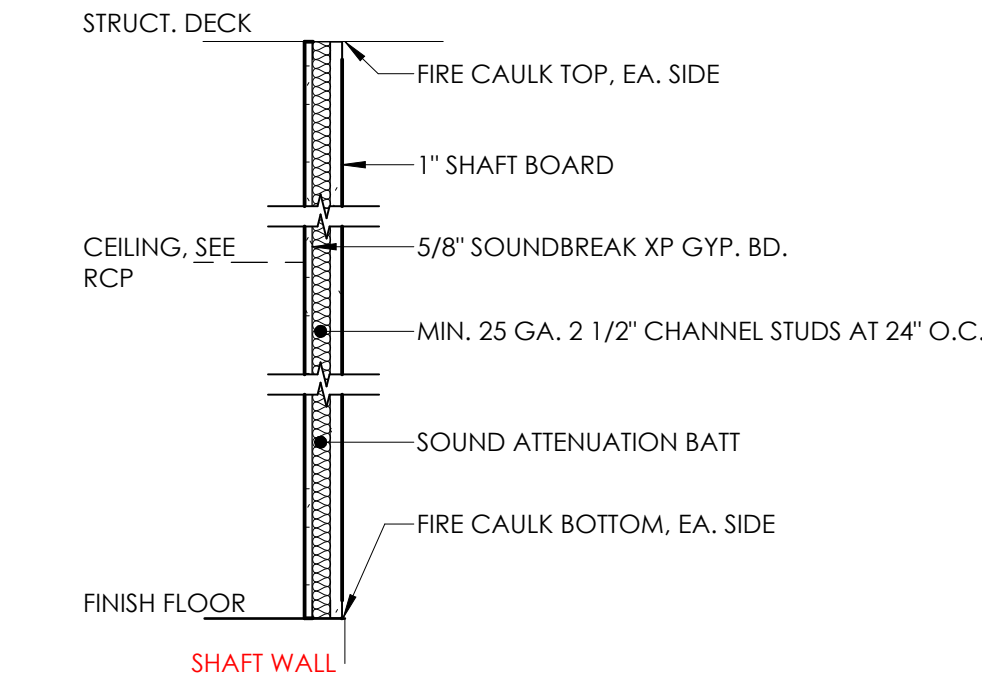



PARTITION TYPE - 7 (1 HOUR)

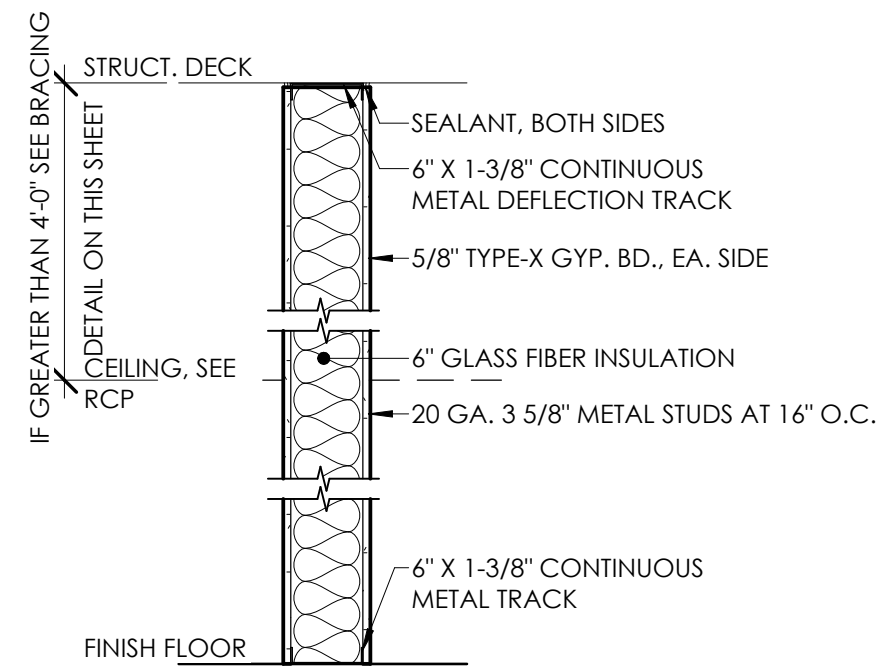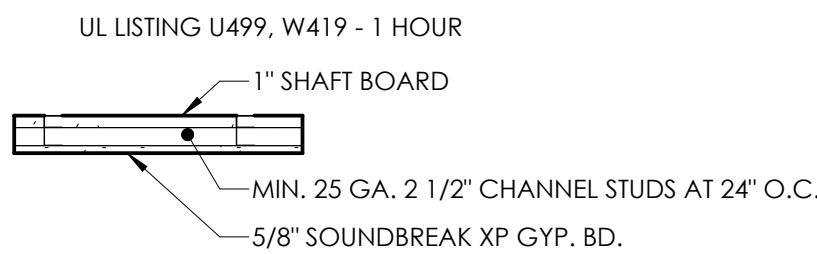



PARTITION TYPE - 4

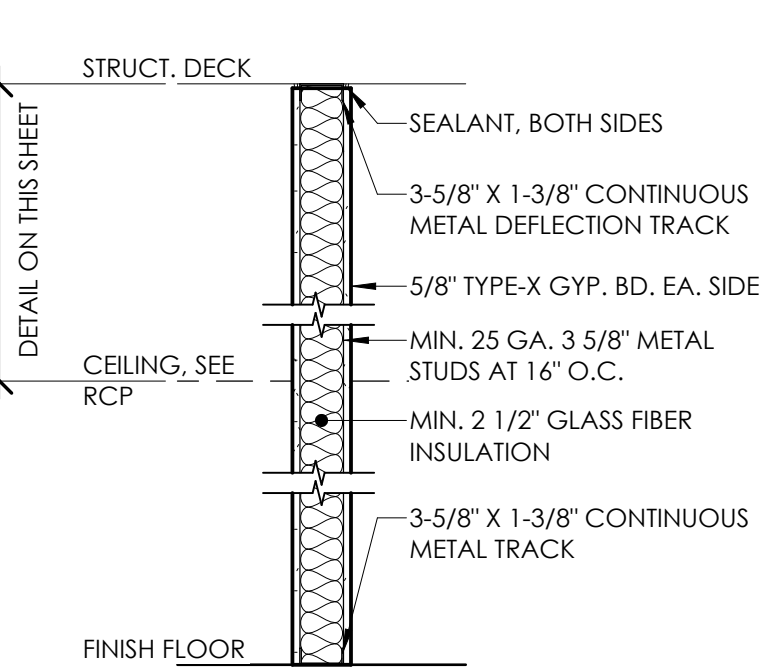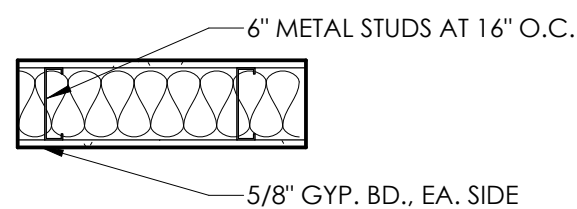



PARTITION TYPE - 1

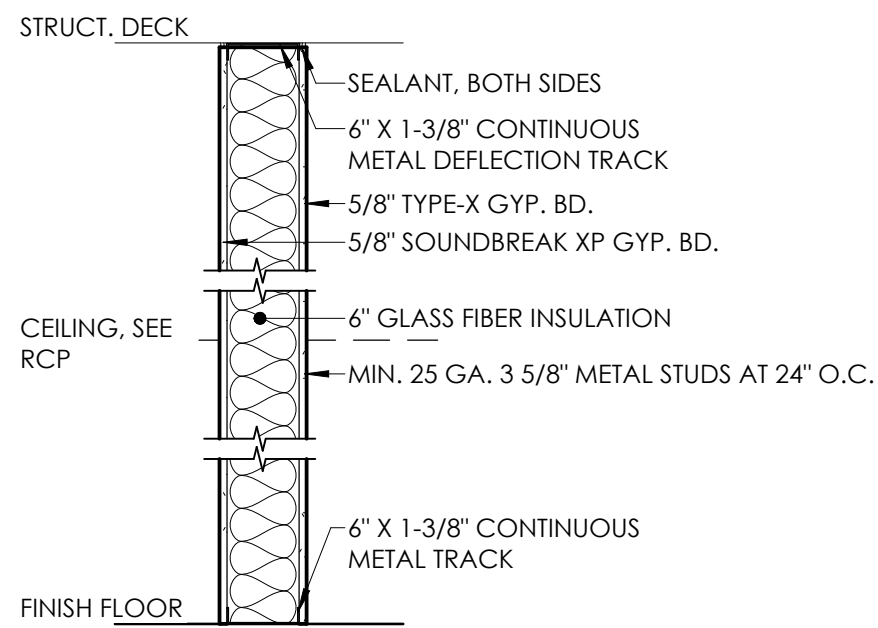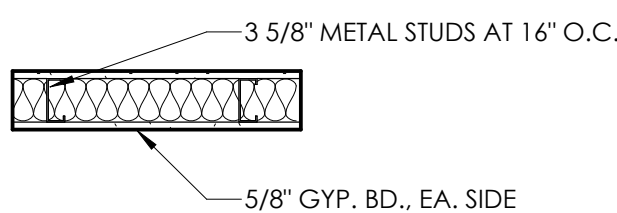



PARTITION TYPE - 5 (1 HOUR)

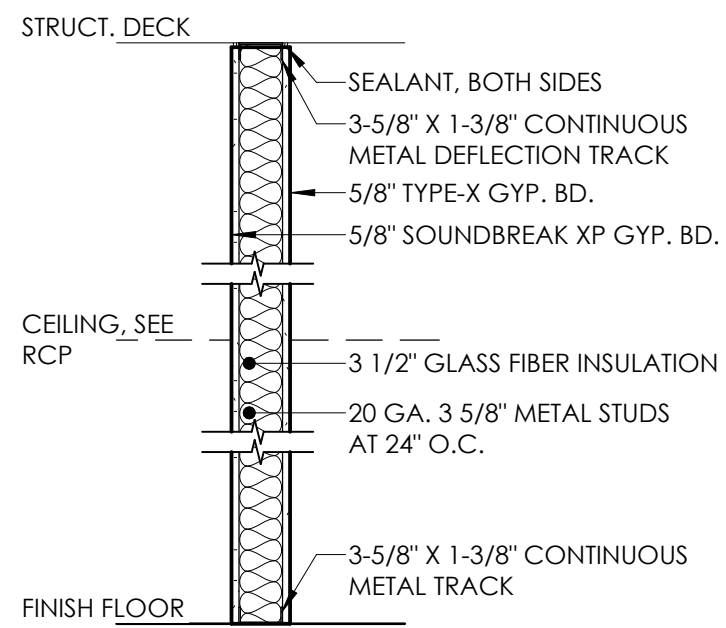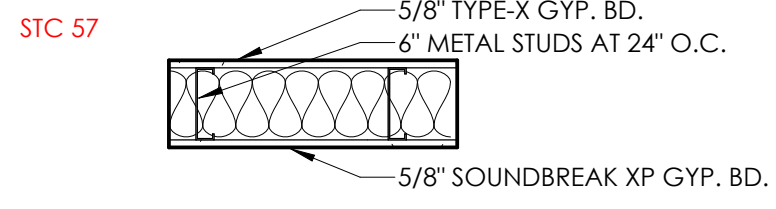


PARTITION TYPE - 2 (1 HOUR)

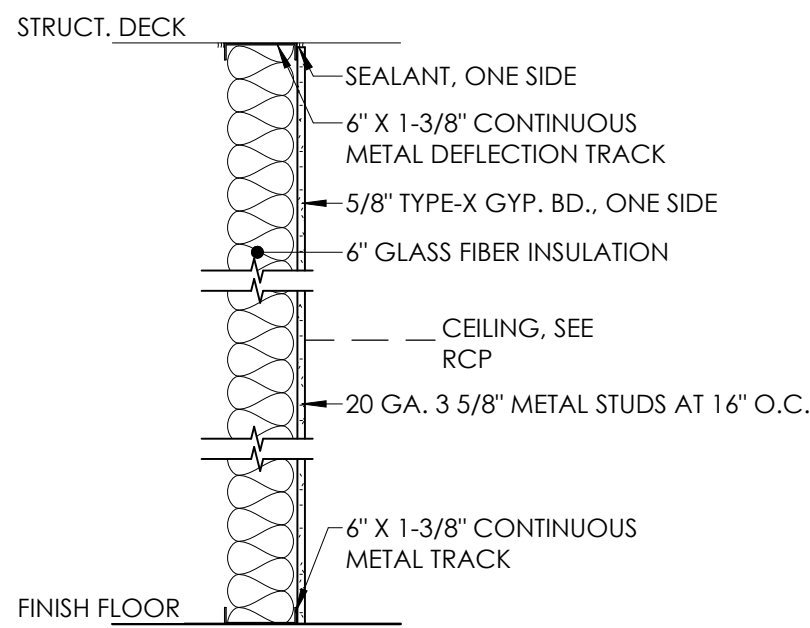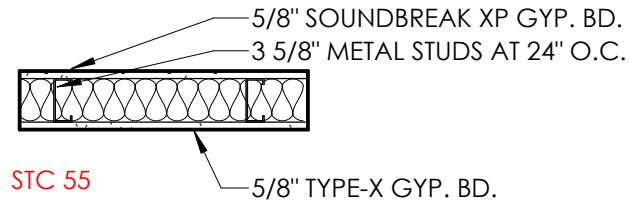


PARTITION TYPE - 6

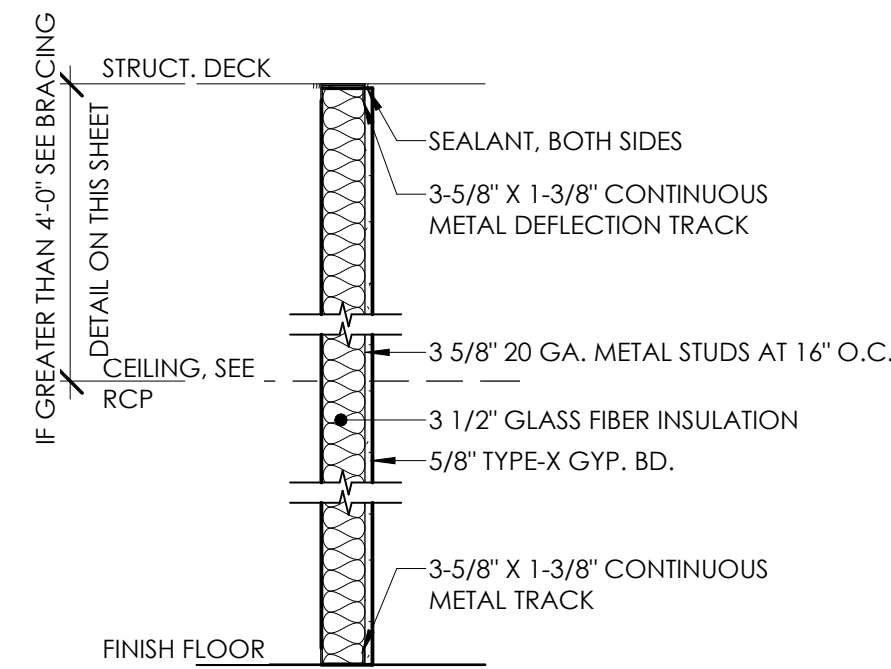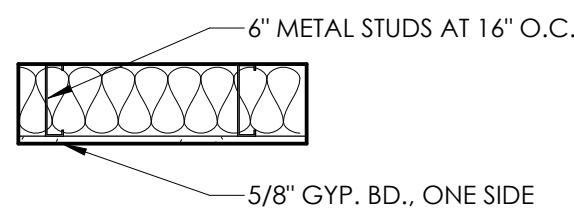


PARTITION TYPE - 3

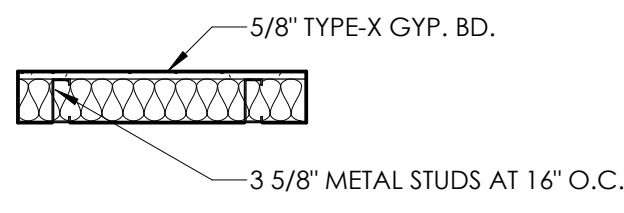

FRAMING DETAILS

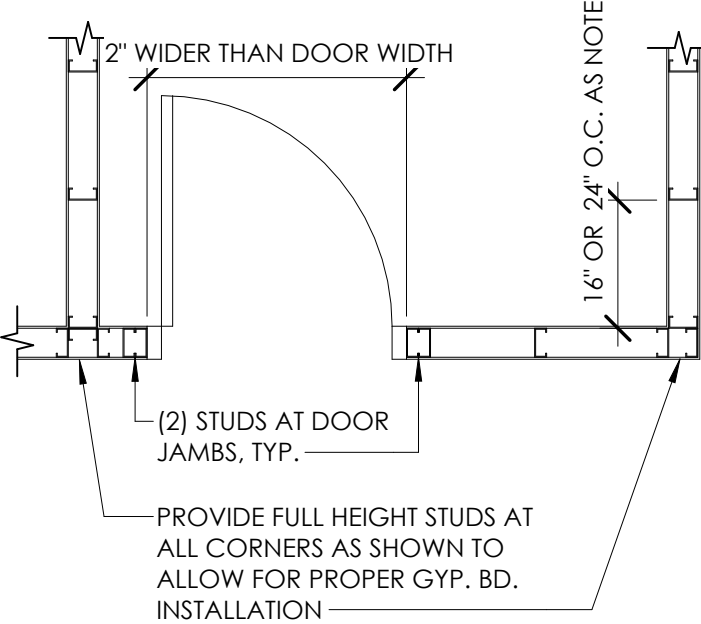


PLAN VIEW

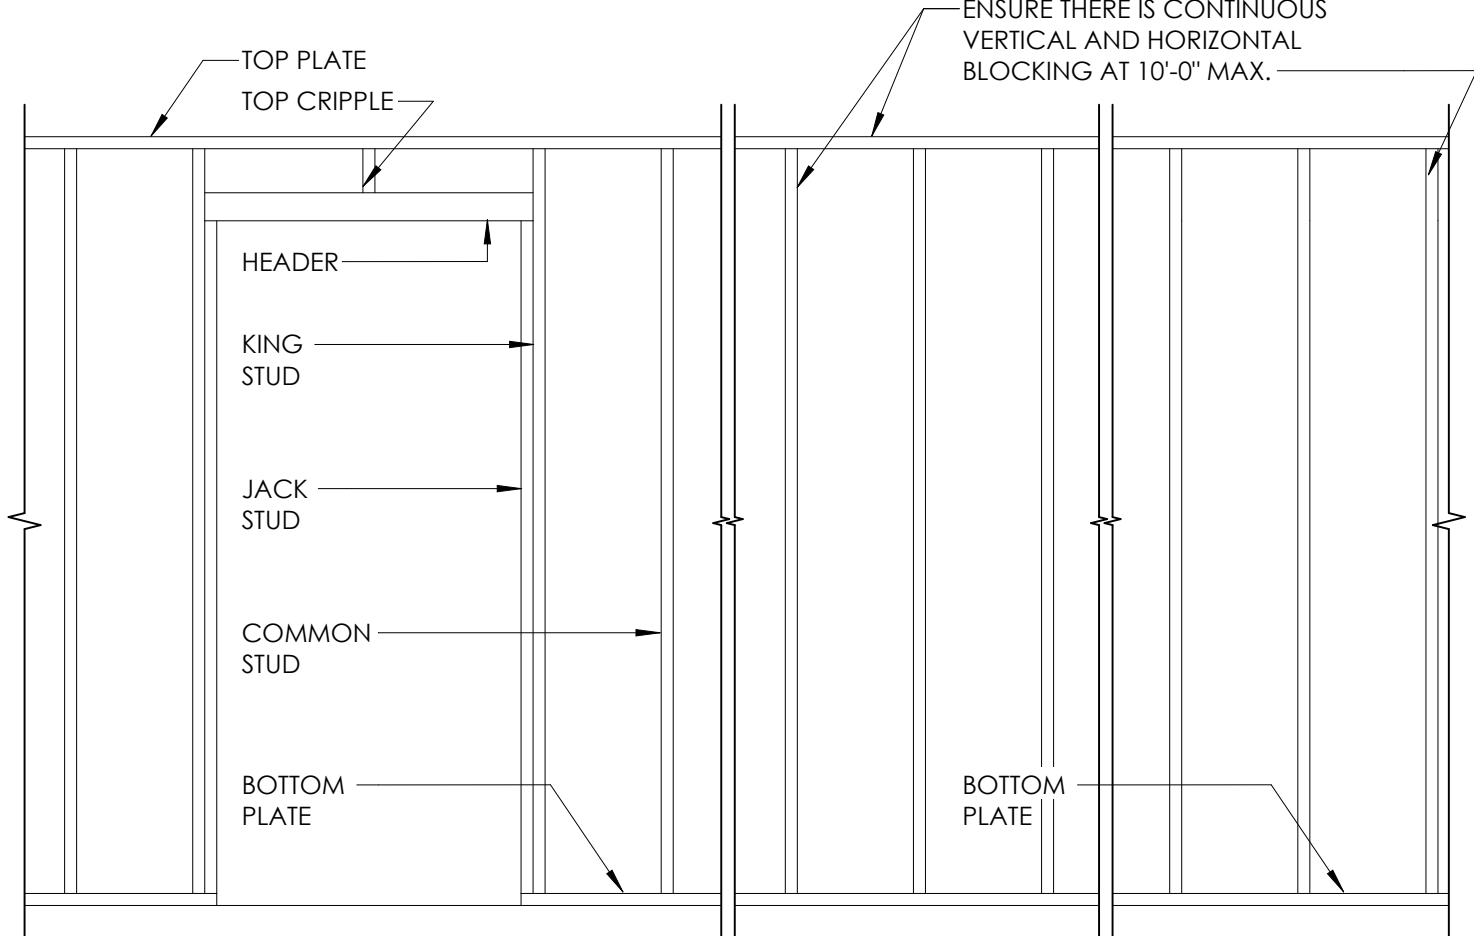

*PROVIDE TREATED WOOD OR METAL TRACK AGAINST ANY CONC. OR MASONRY SURFACE

ELEVATION VIEW

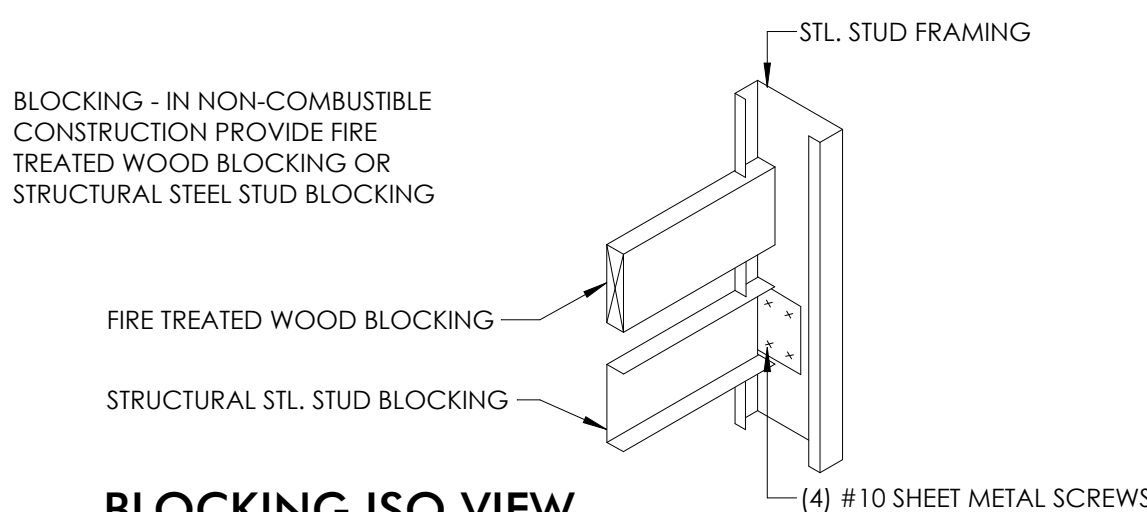

BLOCKING ISO VIEW